

TOWN OF PARADISE VALLEY

Lincoln Drive Median Improvements

November 21, 2019



PROJECT OVERVIEW

Project Overview:

1. Reconstruct Lincoln Dr. Medians between 32nd St. and Tatum Blvd.
2. Reconstruct Lincoln Dr. Medians between Tatum Blvd. and Mockingbird Ln.
3. Lincoln Dr. & Invergordon Rd. Intersection Improvements
4. Design Lincoln Dr. and Tatum Blvd. Intersection Enhanced Crosswalks per Visually Significant Corridor Master Plan
5. Design signalized intersection crosswalks and Lincoln Drive enhanced pavement treatments per Visually Significant Corridor Master Plan (not currently in contract)

Timing of the proposed median improvements is critical for existing utility companies to complete their current installations, construct the proposed median improvements and allow for the Public Works Department asphalt mill & overlay project to start in the fall of 2020.



PROJECT SCOPE

Project Scope:

- Modify, Add/Remove Medians for improved safety, traffic operations and landscaping
- Median Access Priority:
 - a. Police Department & Fire Station No. 2
 - b. Resorts & Places of Worship
 - c. Signalized Intersections & Major Side Streets
 - d. Residential Driveways (Approximately 80)
- Install Irrigation To Medians East of Tatum Blvd.
- Install landscaping In Medians
- Intelligent Transportation System (ITS) Improvements (spare conduit for future use)
- Met with Resorts & Places of Worship to review initial median concepts
- Met individually with Council Members and Town Manager to review initial median concepts



PROJECT SCHEDULE

Current Project Schedule:

- November 2019 Median Layout Verification
- December 2019 Finalize Median Layout, Landscaping and Lincoln & Tatum Intersection Crosswalk Design Options
- January 2020 Town Council & Public Comment
- March 2020 Design Completion
- April 2020 Start Construction (4 to 5 months)
- August 2020 Mill & Overlay Lincoln Dr. (separate project)



LINCOLN DR. & INVERGORDON RD. INTERSECTION



Invergordon Rd. Looking North At Lincoln Dr.



Invergordon Rd. Looking South At Lincoln Dr.



LINCOLN DR. & INVERGORDON RD. INTERSECTION



Invergordon Rd. Looking South Towards Lincoln Dr.

- Add approximately 4' of asphalt and 2' ribbon curb.
- Widening falls within existing right-of-way.
- Staff to work with residential properties affected to coordinate improvements in the right-of-way.
- Driveway modifications, mailbox relocation, landscaping, utilities, etc.



TATUM BLVD. & LINCOLN DR. IMPROVEMENTS


- Provide up to four decorative crosswalk concepts consistent with the Visually Significant Corridor Master Plan for review and approval.
- Provide construction documents for approved concept.
- Construction of crosswalks anticipated to be completed after asphalt mill & overlay project.
- Future project for landscaping and hardscape.



Figure 2.3: Tatum + Lincoln Intersection Concept Simulation Looking Southeast to Camelback Mountain



LINCOLN DR. MEDIAN LAYOUT

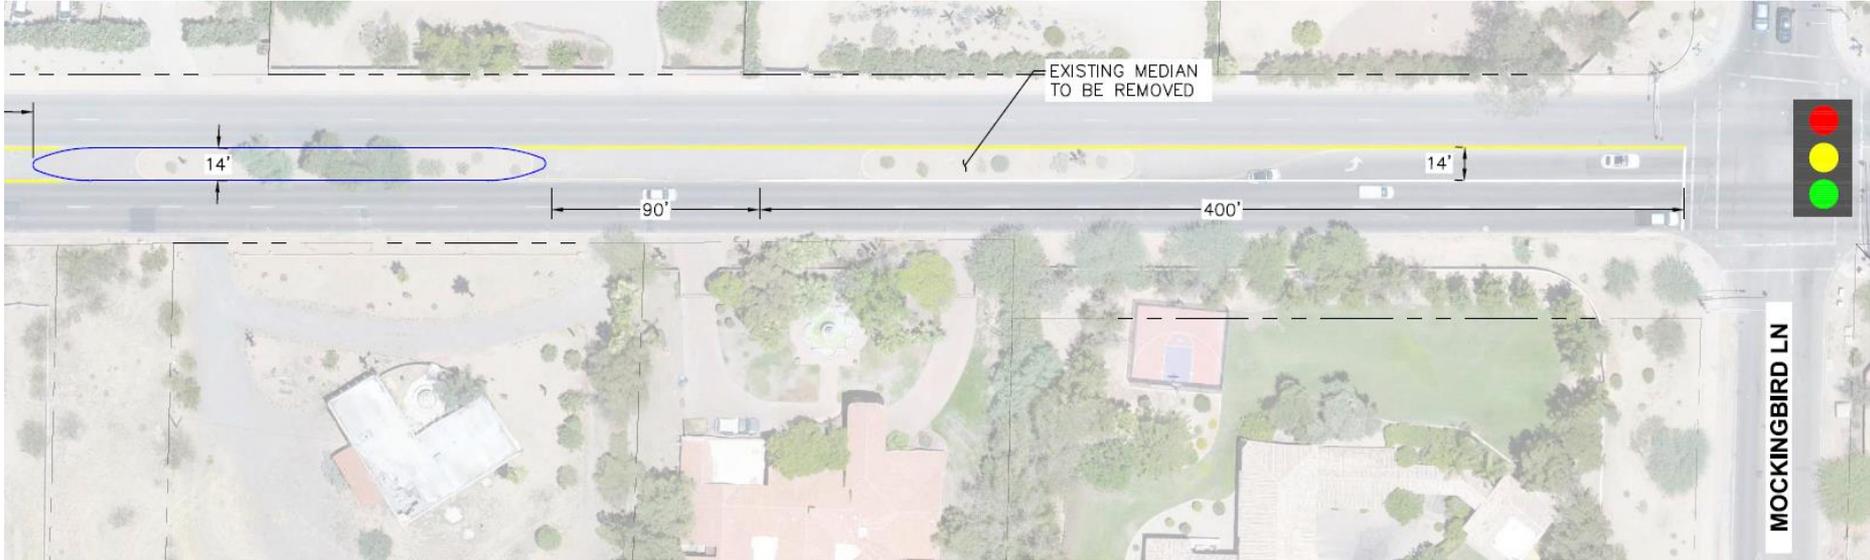

Proposed median improvements west of Mockingbird Lane



QUESTIONS?

